



Parts 1:

[1] Fisher_5000_s20 和 Fisher_1000_s20


随机 sample 若干对语音，提取 d-vector，绘制 t-SNE 图。

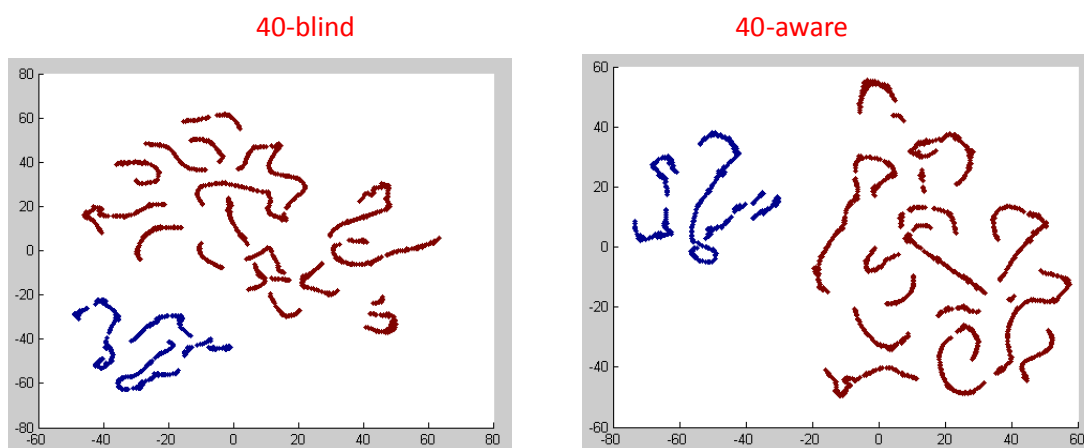


6158f_62160f

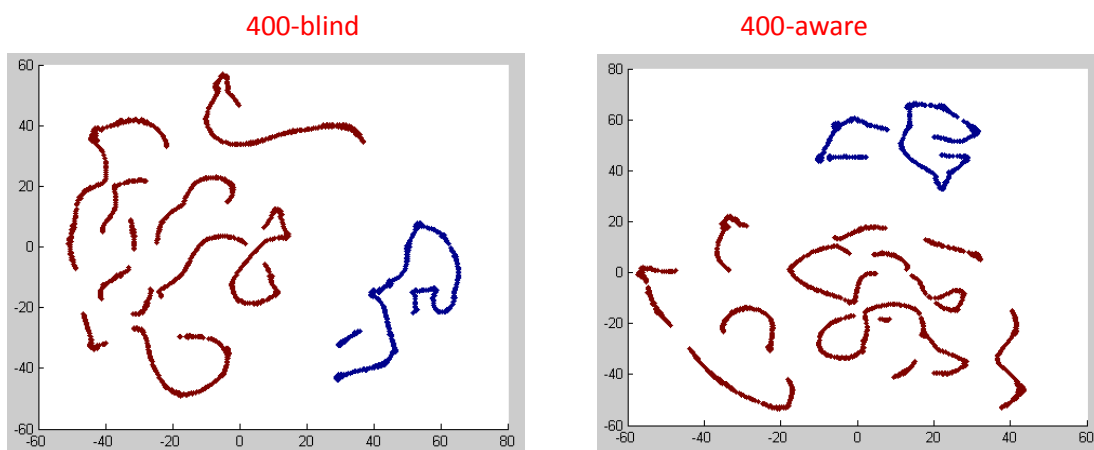

6158f_62160f

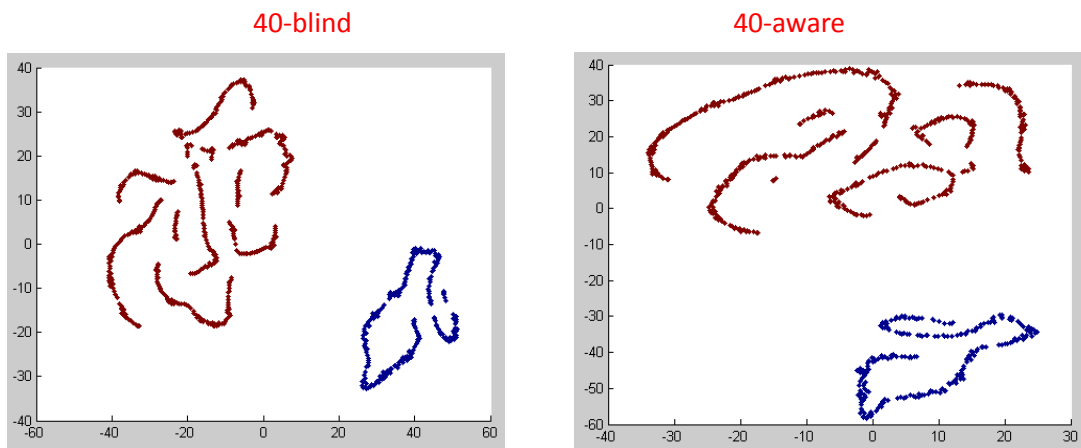

49718m_97464f

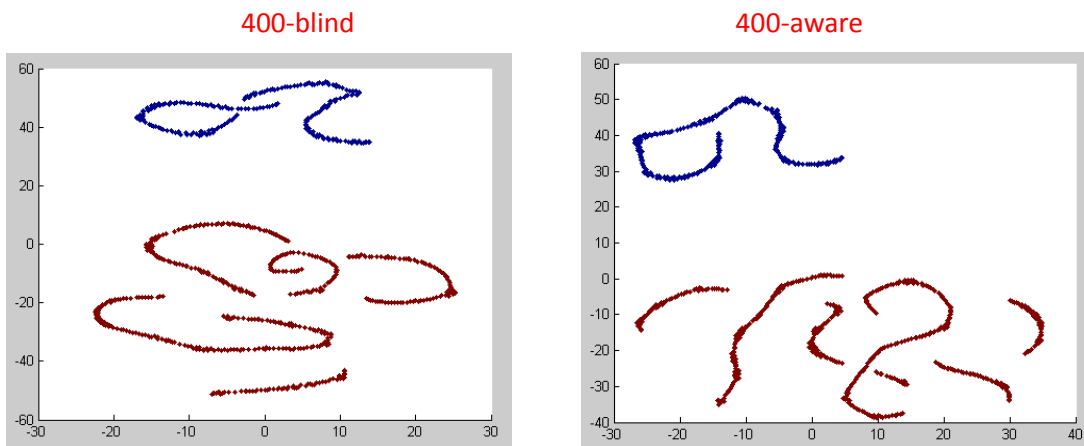


49718m_97464f


Fisher database 上，在同性和异性条件下，d-vector 区分性都很强。

[2] 863_s10

40-blind

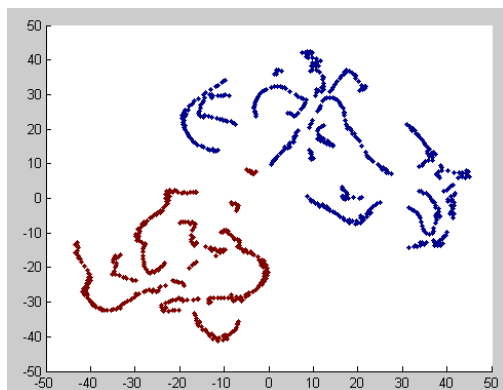


40-aware

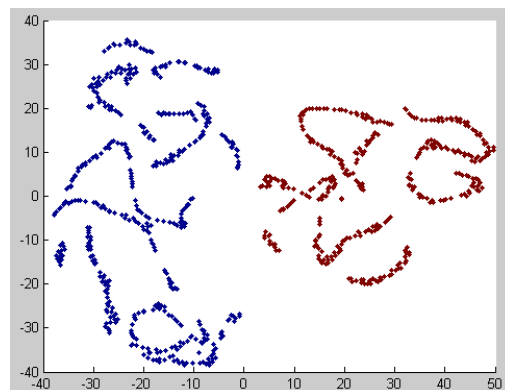


F10B1002_M20A104

400-blind

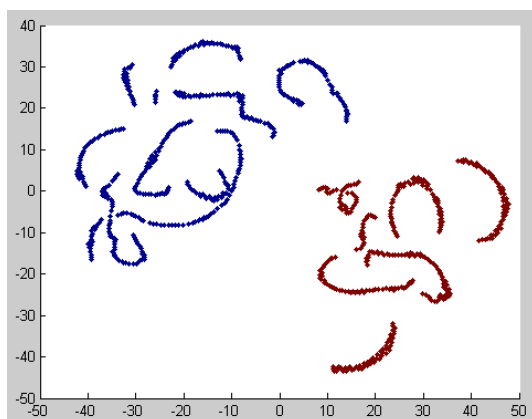


400-aware

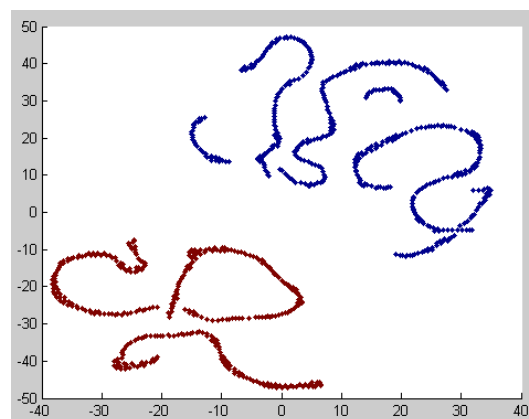


F10B1002_M20A104

40-blind

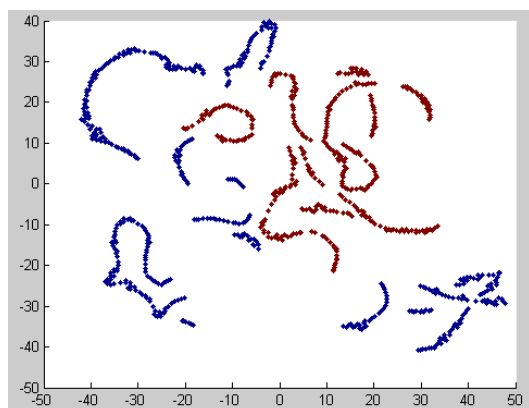

40-aware

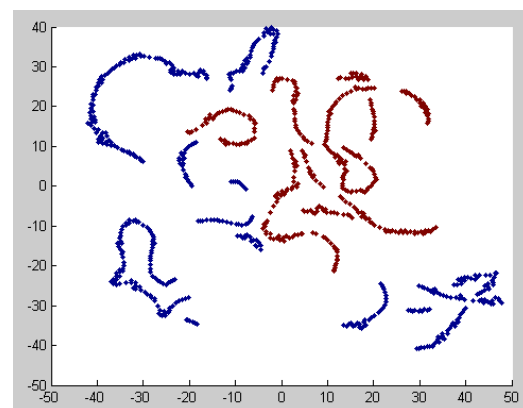

M05A100_M10B1004

Parts 2:

Fisher_059: 真实的对话语音，每条语音包含两个说话人。

Label: 静音、说话人 1、说话人 2、交叠。